




AW MACHINERY

Cooling Troughs

4" COOLING TROUGH - SPRAY, FLOOD, INSULATED						
Model Numbers	Description	Length	Depth	Width	Drain Boxes	Support Stands
CT-4-10	4" Cooling Trough	10'	4"	4"		
		3 m	102 mm	102 mm	2	2
CT-4-20	4" Cooling Trough	20'	4"	4"		
		6 m	102 mm	102 mm	2	2
CT-4-30	4" Cooling Trough	30'	4"	4"		
		9 m	102 mm	102 mm	2	3
CT-4-40	4" Cooling Trough	40'	4"	4"		
		12.2 m	102 mm	102 mm	3	3
CT-4-50	4" Cooling Trough	50'	4"	4"		
		15.2 m	102 mm	102 mm	3	4
CT-4-60	4" Cooling Trough	60'	4"	4"		
		18.3 m	102 mm	102 mm	4	4
CT-4-70	4" Cooling Trough	70'	4"	4"		
		21.3 m	102 mm	102 mm	4	5
CT-4-80	4" Cooling Trough	80'	4"	4"		
		24.4 m	102 mm	102 mm	5	5
COOLING TROUGH (4" High Speed Retractable Section)						
Model Numbers	Description	Length	Depth	Width	Drain Boxes	Support Stands
CT-4R	Retractable Section for use with 4" Std. or High Speed Cooling Trough	60"	4"	4"		
		1.5 m	102 mm	102 mm	1	1
6" COOLING TROUGH - SPRAY, FLOOD, INSULATED						
Model Numbers	Description	Length	Depth	Width	Drain Boxes	Support Stands
CT-6-10	6" Cooling Trough	10'	6"	6"		
		3 m	152 mm	152 mm	2	2
CT-6-20	6" Cooling Trough	20'	6"	6"		
		6 m	152 mm	152 mm	2	2
CT-6-30	6" Cooling Trough	30'	6"	6"		
		9 m	152 mm	152 mm	2	3
CT-6-40	6" Cooling Trough	40'	6"	6"		
		12.2 m	152 mm	152 mm	3	4
CT-6-50	6" Cooling Trough	50'	6"	6"		
		15.2 m	152 mm	152 mm	3	5
CT-6-60	6" Cooling Trough	60'	6"	6"		
		18.3 m	152 mm	152 mm	4	6
CT-6-70	6" Cooling Trough	70'	6"	6"		
		21.3 m	152 mm	152 mm	4	7
CT-6-80	6" Cooling Trough	80'	6"	6"		
		24.4 m	152 mm	152 mm	5	8
COOLING TROUGH (6" High Speed Retractable Section) for use with Spray or Flood Trough						
Model Numbers	Description	Length	Depth	Width	Drain Boxes	Support Stands
CT-6R	Retractable Section for use with 6" Cooling Trough	60"	6"	6"		
		1.5 m	152 mm	152 mm	1	1

4 x 4 Cooling Trough with quench ring, short "V" cooling channel, and simple high speed spray, and manual or motorized retraction.

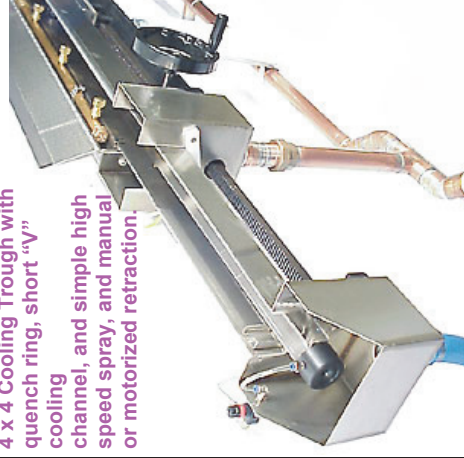

Features

- Brushed Stainless Steel
- Standard 10' or 20' long sections
- Drain Boxes included
- Stands included
- Baffled water inlet
- Optional retractable
- "V" or flat bottom
- Standard sizes 4" x 4" or 6" by 6"
- Optional Airwipers
- Optional capacitance or eccentricity sensor holder
- Many systems in stock